



Securing Today for a Profitable Tomorrow

External Alarms

For Systems and Deactivators



External Alarms are designed for environments where background music or noise makes it difficult for employees to hear the normal label/tag detection or deactivation sounds.

WG-EXA-FPSP For StealthPad and FastPad deactivators the alarm box is designed for tabletop or open counter mounting and delivers a 90dB sound. It also includes a relay output port for external use.

WG-EXA-G For EAS systems, the alarm box provides flexible alarm modes, including multiple tones and pre-recorded voice output, plus alarm count. In addition to its attractive design, it can be conveniently wall mounted.

Guard Systems
Programmable tones and voice, with alarm counter.

Deactivators
Alarm and external relay output.

PERFECT FOR NOISY ENVIRONMENTS

Premier and Plus Line Systems



- Premier Guard
- Premier Pro
- Premier Door Guard
- Mono Plus
- Uni Plus

Guard Systems

- Mono-Guard
- Multi-Guard
- Pro-Guard
- Uni-Guard
- Sky-Guard

Deactivators

- FastPad
- StealthPad

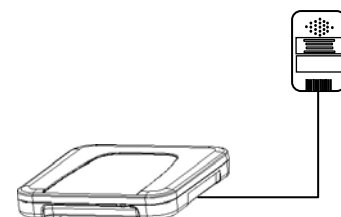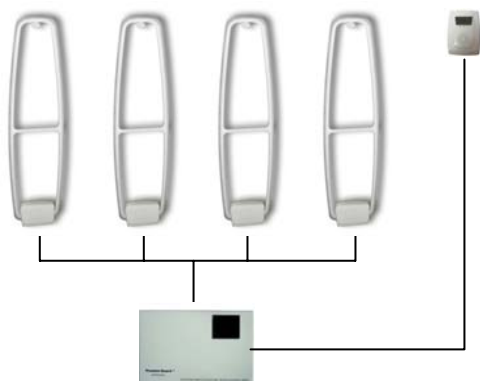

WG-EXA-G Physical Specifications

- Length 210mm (8.27")
- Width 152mm (6")
- Thickness 60mm (2.36")
- Electrical 10vac, 50/60Hz
- Rated Current 0.8A
- Operating Temperature 0-49°C(32-120°F)
- Relative Humidity 0-85% non-condensing

Note: Power supply not included.

WG-EXA-FPSP Physical Specifications

- Length 99mm (3.9")
- Width 69mm (2.7")
- Thickness 38mm (1.5")
- External Relay Rating 220vac @1A

Ordering Information
WG-EXA-G for Guard Systems
WG-EXA-FPSP for Deactivators

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE