



Securing Today for a Profitable Tomorrow

External Alarms™ For EAS Systems and Deactivators



External Alarms are designed for environments where background music or noise makes it difficult for employees to hear the normal label/tag detection or deactivation sounds.

WG-EXA-FPSP is designed for Stealth Pad and Fast Pad deactivators. The alarm box is adaptable for tabletop or open counter mounting and delivers a 90dB sound. It also includes a relay output port for external use.

WG-EXA-G For EAS systems, the alarm box provides flexible alarm modes, including multiple tones and pre-recorded voice output, plus alarm count. In addition to its attractive design, it can be conveniently wall mounted.

Guard Systems

Programmable tones and voice, with alarm counter.

Deactivators

Alarm and external relay output.

Perfect for Noisy Environments


WG-EXA-G External Alarm is compatible with all our Guard systems.

- ◆ Ad Guard
- ◆ Ad Guard XL
- ◆ Premier Guard
- ◆ Premier Pro
- ◆ Premier Guard Gen II
- ◆ Premier Pro Gen II
- ◆ Lane Guard
- ◆ Floor Guard
- ◆ Door Guard
- ◆ Sky Guard



WG-EXA-FPSP External Alarm is compatible with our deactivators.

- ◆ Lynx
- ◆ Stealth Pad
- ◆ Fast Pad

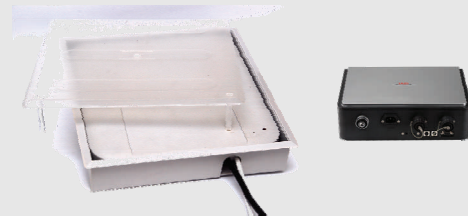

WG-EXA-G Specifications

Length: 210mm (8.27")
 Width: 152mm (6")
 Thickness: 60mm (2.36")
 Electrical: 110vac, 50/60Hz
 Rated Current 0.8A

Operating Temperature 0-49°C (32-120°F)
 Relative Humidity 0-85% non-condensing

Note: Power supply not included.

WG-EXA-FPSP Specifications

Length: 99mm (3.9")
 Width: 69mm (2.7")
 Thickness 38mm (1.5")

External Relay Rating 220vac @1A

Note: Power supply not included.

Ordering Information

WG-EXA-G External Alarm (Guard Systems)
 WG-EXA-FPSP External Alarm (Deactivators)

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE