



Securing Today for a Profitable Tomorrow

WGDC™

Double Checker Deactivator



Operates with any 58Khz acousto-magnetic tags and labels !



WGDC provides reliable label deactivation through direct contact. Depending upon the thickness or type of packing material, it can also deactivate labels adhered on the inside of the product packaging.

Establishing customer confidence was of primary concern in the design of our deactivator. As the label is swiped to deactivate it, a second motion will test the label to ensure it was successfully deactivated.

CONFIRM THE LIVE LABEL, DEACTIVATE, AND DOUBLE-CHECK IT

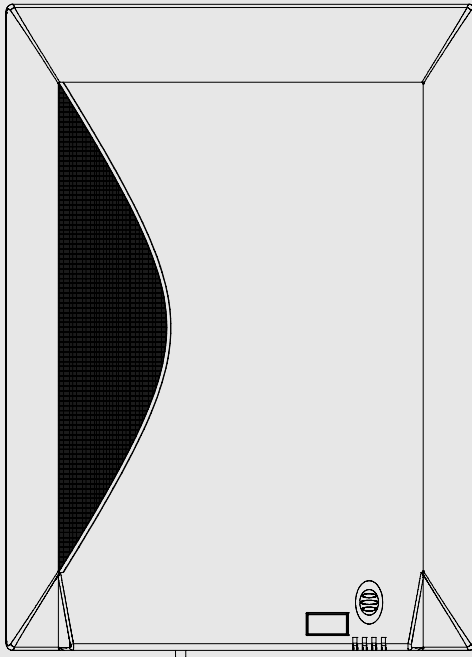

Electro-Mechanical Specifications

Mechanical - Double Checker Box

Dimensions	34x24x2.5cm (LxWxH) (13.4"x9.5"x1")
Weight	0.7 Kg (0.3lb)

Electrical - Double Checker Box

AC Voltage	2 x 10vac @300mA (Stepdown from 110/220vac)
Current Draw	0.1A rms
Input Power	< 3Watts

Recommended Power Supply (Not Provided)

AC Voltage	100-120vac or 220vac @50/60Hz (Stepdown to 2 x 10vac @300mA)
Current Draw	0.027A rms
Input Power	< 6 Watts

Regulatory

Safety	CE EN60950
EMC	FCC P91 WGDC58K

Product Code

Double Checker	WG-DC58-1
----------------	-----------

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE