



# WiFi Ad Guard XL

## Dual Function System

**Increased Security Zone  
Plus More Advertisement Space**

AD Guard XL is the big brother of the Ad Guard article surveillance system.

Because advertisement sometimes needs more space for better recognition or antennas need a larger enhance coverage, Ad Guard XL is the perfect solution. This system provides up to 10 feet of coverage between the antennas. Most customers use the larger advertising space for permanent image communication.

Advanced signal processing technology provides detection of up to 8 feet between two antennas

The system software can be optimized to your selection of ferrite hard tags or labels.

Jammer detection and **remote access** for quick support response are standard on all WiFi systems.



### **WG Security Products Inc.**

591 W. Hamilton Ave., Suite 260  
Campbell, CA 95008 (USA)

**Email:** info@wgspi.com

**Tel:** 408-241-8000

**Fax:** 408-559-2073


[www.wgspi.com](http://www.wgspi.com)



**Ask us about our smart tag 4-Alarm technology for improved theft protection!**



## WiFi Ad Guard XL Specifications


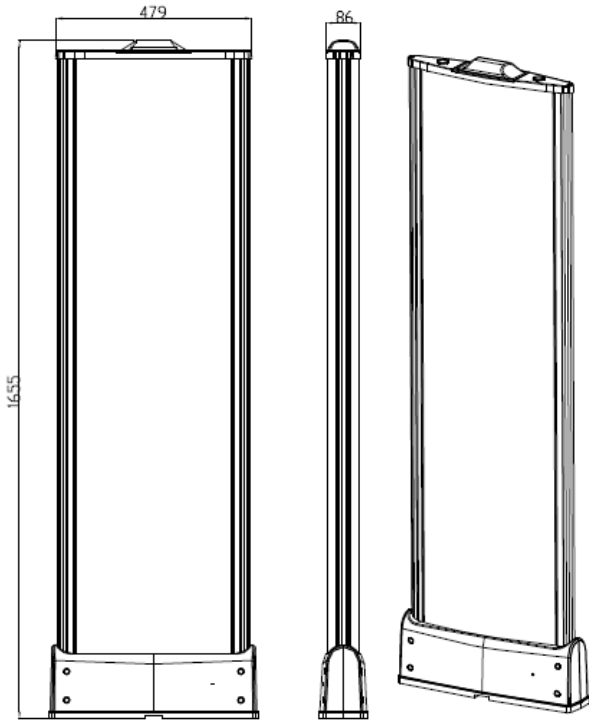


### Antenna

Operational Frequency: 58 kHz  
 Input Voltage: 24vac  
 Overall Dimensions: 65"x19"x3.4" (1655x479x86 mm)  
 Weight: Est. 58 lb (26 kg)  
 Base Dimensions: 19.5"x4.7" (356x120 mm)  
 Advertising Space: 16.73"x57.09" (425x1450 mm)

### Power Supply

Input: 100-120/220-240vac 50/60Hz  
 Current: 0.5A max  
 Output: 24vac  
 Ambient temperature: 0 ° - 40 ° C  
 Weight: 6.6 lb (3 kg)

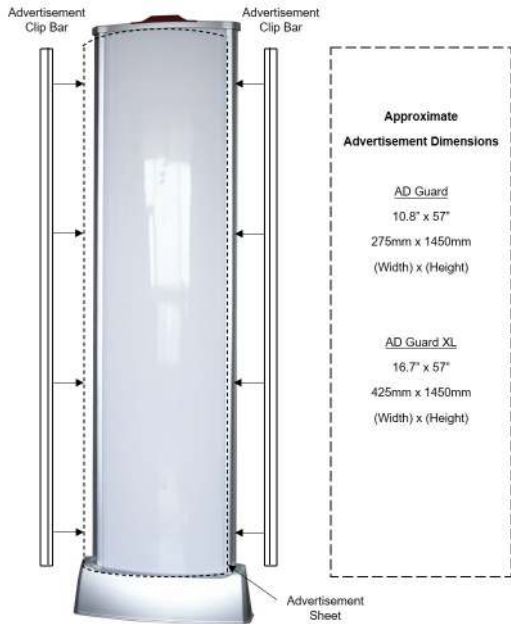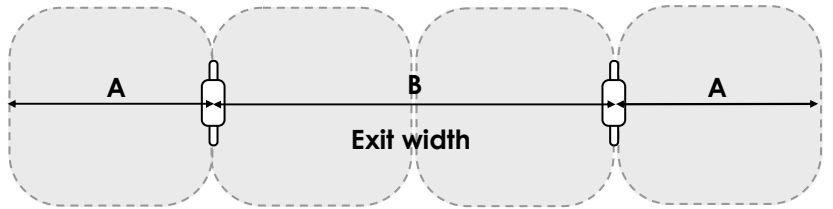

Detection Zones			
Tag Type	A	B	A
Label	4' (120cm)	8' (240cm)	4' (120cm)
Micro Shell, Micro Pencil, Lanyard Tag	4' (120cm)	8' (240cm)	4' (120cm)
Shell, Mid Pencil	4' (120cm)	8' (240cm)	4' (120cm)
Super Pencil	5' (160cm)	10' (320cm)	5' (160cm)
Super Pencil	6' (190cm)	12' (380cm)	6' (190cm)

### Notes:

- Environmental conditions may affect overall detection performance.
- WG hard tags are recommended for optimum performance. Labels are not manufactured by WG and may at times underperform, resulting in decreased detection performance.
- Avoid false alarms by maintaining a 5-foot zone between the antennas and tagged articles.

### Product Codes:

WG W FAGX WiFi Ad Guard XL Pedestal

WG SPS-24 Smart Power Supply